



LED TRACK LIGHT Series

Features

- Imported LED light source, high luminous efficiency, quality and stability;
- Design elegant and generous, a variety of colors to meet the needs of a variety of different styles;
- 360 degrees up and down around a plurality of angle adjusting irradiation exhibits;
- CRI greater than 80, it can better restore the illuminated object color;
- Efficient optical lens, optical loss, good illumination;
- Green, no radiation, low power consumption;
- Life of up to 50,000 hours.

Applications

For shopping malls, home, office, hotel, stores and other places lighting.






Item No.

Light Source
Power
Voltage
Beam Angle
CRI
PF
CCT
Luminous Flux
Hole Size


LP-TF-TK-4201

COB
7W
AC 100-240V 50/60Hz
24° /40°
≥80
≥0.9
3000K /4000K /5000K
490lm /505lm /525lm
Ø60 x105mm


Lux-distance Curve

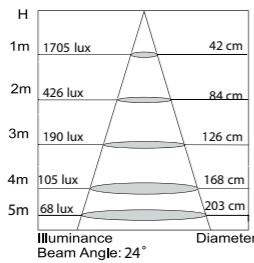

Candle Power Distribution






Dimensional Diagrams



LP-TF-TK-4202

COB
10W
AC 100-240V 50/60Hz
24° /40°
≥80
≥0.9
3000K /4000K /5000K
700lm /720lm /750lm
Ø60 x 105mm




Item No.

Light Source
Power
Voltage
Beam Angle
CRI
PF
CCT
Luminous Flux
Hole Size


LP-TF-TK-4203

COB
20W
AC 100-240V 50/60Hz
24° /40°
≥80
≥0.9
3000K /4000K /5000K
1500lm /1550lm /1600lm
Ø75 x 125mm


Lux-distance Curve



Candle Power Distribution






Dimensional Diagrams






LP-TF-TK-4204

COB
30W
AC 100-240V 50/60Hz
15° /24° /40°
≥80
≥0.9
3000K /4000K /5000K
2400lm /2460lm /2550lm
Ø90 x 145mm



LP-TF-TK-4205

COB
40W
AC 100-240V 50/60Hz
15° /24° /40°
≥80
≥0.9
3000K /4000K /5000K
3200lm /3300lm /3400lm
Ø90 x 145mm






Item No.

Light Source
Power
Voltage
Beam Angle
CRI
PF
CCT
Luminous Flux
Hole Size


LP-TF-TK-4301

COB
20W
AC 100-240V 50/60Hz
15° /30°
≥80
≥0.9
3000K /4000K /5000K
1500lm /1550lm /1600lm
234 x 170 x 82mm


Lux-distance Curve



Candle Power Distribution






Dimensional Diagrams



LP-TF-TK-4302

COB
30W
AC 100-240V 50/60Hz
15° /30°
≥80
≥0.9
3000K /4000K /5000K
2400lm /2460lm /2550lm
242 x 190 x 100mm




Item No.

Light Source
Power
Voltage
Beam Angle
CRI
PF
CCT
Luminous Flux
Hole Size


LP-TF-TK-4303

COB
20W
AC 100-240V 50/60Hz
30°
≥80
≥0.9
3000K /4000K /5000K
1500lm /1550lm /1600lm
165 x 75 x 125mm


Lux-distance Curve



Candle Power Distribution






Dimensional Diagrams



LP-TF-TK-4304

COB
30W
AC 100-240V 50/60Hz
30°
≥80
≥0.9
3000K /4000K /5000K
2400lm /2460lm /2550lm
197 x 90 x 140mm

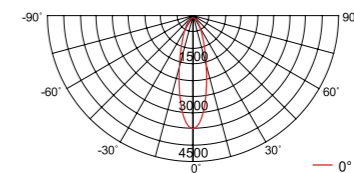

LP-TF-TK-4305

COB
40W
AC 100-240V 50/60Hz
30°
≥80
≥0.9
3000K /4000K /5000K
3200lm /3300lm /3400lm
205 x 101 x 164mm

